

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 March 2006 (16.03.2006)

PCT

(10) International Publication Number
WO 2006/028324 A1

(51) International Patent Classification: **A47L 15/42**

(21) International Application Number:
PCT/KR2005/001545

(22) International Filing Date: 25 May 2005 (25.05.2005)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2004-0056046 19 July 2004 (19.07.2004) KR

(71) Applicant (for all designated States except US): LG
ELECTRONICS, INC. [KR/KR]; 20 Yoido-dong,
Youngdungpo-gu, Seoul 150-875 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HWANG, Gab-Kyu
[KR/KR]; 978-6, Jisan1-dong, Susung-gu, Daegu-si
706-091 (KR).

(74) Agent: HAW, Yong-Noke; 8th Fl. Sonchon Bldg., 642-15,
Yoksam-dong, Kangnam-gu, Seoul 135-080 (KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: A NOZZLE STRUCTURE OF DISH WASHER

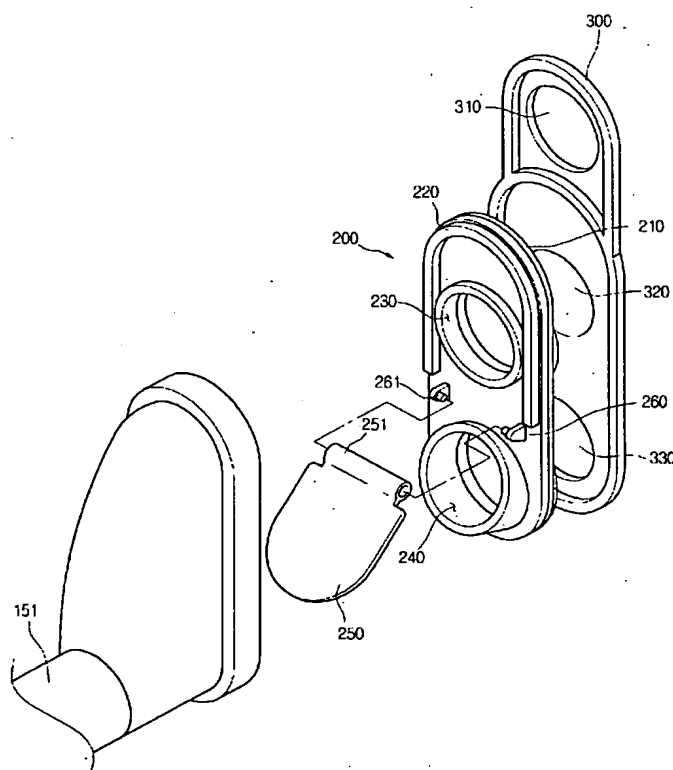

(57) Abstract: A nozzle structure
of a dish washer is provided. In the
nozzle structure, a nozzle holder is
provided, a gasket unit is mounted
on an end of the nozzle holder and
it includes at least one inlet port, a
flap support unit is protruded from a
front of the gasket unit, and a check
valve flap is rotatably coupled to the
flap support unit.

WO 2006/028324 A1

WO 2006/028324 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.